



**CAVALIER**





## THE MAVERICK

PORTABLE BLUETOOTH/WIFI SPEAKER SYSTEM  
ALEXA VOICE CONTROL BUILT-IN + CHARGING BASE

Model: CAV1-PLUS

## WHAT'S IN THE BOX:


- The Maverick (CAV1-PLUS)
- USB-C charging cable
- USB wall adapter
- Charging Base
- Protective Travel Bag



## WHAT YOU'LL NEED:

- Wi-Fi network transmitting at 2.4GHz
- Apple device running iOS 10 or later or Android device running Lollipop 5.0 or later connected to your preferred Wi-Fi network
- Install the Cavalier app and Amazon Alexa app (iOS or Android) for setup and to enable Alexa voice control and Wi-Fi streaming music services

# SETUP OVERVIEW

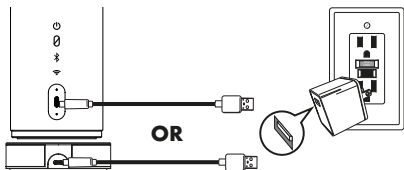- 1 Plug included USB-C cable into USB charging port on back of unit OR on the charging base. Connect other end of cable to included USB AC adapter and plug into working wall outlet.



- 2 Download the  Cavalier app from the App Store or Google Play.
- 3 Download the  Amazon Alexa app from the App Store or Google Play.
- 4 Follow Cavalier in-app instructions for account setup and to establish your speaker's Wi-Fi connection.
- 5 Connect your Amazon account to enjoy the Alexa voice capability of your CAV1.



Use the Cavalier app to:

- CONNECT TO WI-FI
- SETUP ALEXA
- CUSTOMIZE CONTROLS
- AND MORE!



Use the Amazon Alexa app to:

- MANAGE AMAZON ACCOUNT
- LINK STREAMING SERVICES
- ACTIVATE ALEXA SKILLS
- AND MORE!



## USING THE AMAZON ALEXA APP WITH THE MAVERICK

- 1 Open the Amazon Alexa app on your device to activate, access, and manage Amazon Voice Services
- 2 Link Wi-Fi streaming music services (such as Pandora, TuneIn, iHeartRadio, Spotify, and Amazon Music)
- 3 Enable your favorite Alexa Voice Skills
- 4 Setup compatible Smart Home devices


---

## USING SPOTIFY CONNECT WITH THE MAVERICK

- 1 Connect your Maverick to your Wi-Fi network
- 2 Open up the Spotify app on your phone, tablet or laptop using the same Wi-Fi network
- 3 Play a song and select Devices Available
- 4 Select your Maverick and start listening

The Spotify Software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses)

# REAR INDICATORS & USB PORT

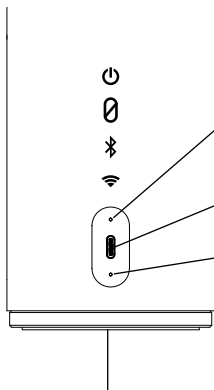

## Bluetooth/Wi-Fi Indicator

- ✳ Flashing blue = pairing
- Solid blue = paired
- ✳ Flashing white = Wi-Fi setup/No Connection
- Solid white = Wi-Fi connected

## USB-C Charging Port

- To power The Maverick and charge for portable use

## Charging Indicator

- Solid red = charging
- Solid green = charged

## Battery Indicator

- ✳ Flashing red = low battery

### Hardware Reset

If unit is not responding, insert the end of a paper clip or similar into reset port on bottom of unit.

# REAR CONTROLS



## **Power Button**

- Press and hold for more than 2 seconds to power The Maverick ON.  
Press and hold for more than 4 seconds to power OFF.
- Press and release to view battery level



## **Mute Button**

- Press to mute and unmute microphones (enables privacy for both Alexa and Speakerphone)



## Bluetooth Button

- Press to enter Bluetooth Mode
- Press and hold for 2 seconds to enter Bluetooth Pairing Mode
- Select 'Cavalier Maverick' to pair
- Press and hold for 10 seconds to clear/reset Bluetooth




## **Wi-Fi Button**

- Press for Wi-Fi mode
- Press and hold for 5 seconds for Wi-Fi setup mode
- Press and hold for 15 seconds to clear/reset Wi-Fi and Alexa

# TOP CONTROLS

## Cavalier Smart Button



## VOLUME:

- ☞ Rotate right to raise volume
- ☜ Rotate left to lower volume

## AUDIO CONTROLS:

- Tap 1x to Play/Pause audio
- Tap 2x to track forward
- Tap 3x to track back
- \*\*2x and 3x taps functions can be programmed via the Cavalier app

## AMAZON ALEXA:


- Press and hold to wake Alexa (overrides Bluetooth)

## SPEAKERPHONE:

- Tap 1x to answer a Bluetooth call
- Press and hold to ignore/end call



# FRONT STATUS LEDs

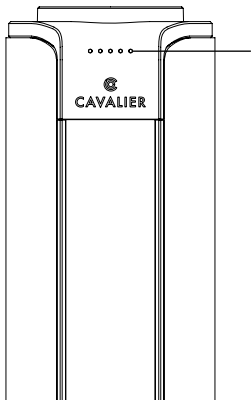

## Volume/Alexa/Battery Level Indicator

Lit indicators match volume level

Red = muted / Yellow = notification

Battery level (white LED match battery level)

Press and release Power Button to view

○ LED ON    ● LED OFF

---

- ● ● ● No battery (needs charging)
- ● ● ● Low battery (charge soon)
- ○ ● ● Up to 45 % charged
- ○ ○ ● Up to 70 % charged
- ○ ○ ○ Up to 85 % charged
- ○ ○ ○ Up to 100 % charged

NOTE: When operating on battery, unit will power down automatically after 15 minutes of no audio unless connected to Wi-Fi.

## FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.  
The device can be used in portable exposure condition without restriction.

This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## CAN ICES-3 (B)/NMB-3(B)

### Canada Statement

This device complies with Industry Canada's licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

le dispositif a été évalué à satisfaire l'exigence générale de l'exposition aux rf. l'appareil peut être utilisé dans des conditions d'exposition portatif sans restriction.

## Internal Rechargeable Lithium-ion Battery

This device uses an internal non-replaceable rechargeable lithium-ion battery that should last the lifetime of the device. If you suspect your battery may be dead, try charging it for an extended period of time and try resetting the unit. If this fails, contact Customer Service at 1-800-925-6224.

### WARNING/DISPOSAL OF UNIT

Do NOT attempt to change the battery. Doing so will void the warranty and could cause injury and damage to your device.

To dispose of the unit, follow the instructions below:

- Never dispose of used batteries/electronics with ordinary solid wastes, since they contain toxic substances.
- Always dispose of used batteries/electronics in accordance with the prevailing community regulations.
- Many electronics retailers now recycle batteries and other electronic components at no charge.

### GENERAL BATTERY PRECAUTIONS

- Never use or charge a battery if it appears to be leaking, discolored, deformed, or in any way abnormal.
- Never disassemble the unit or attempt to remove battery as that could cause leakage of alkaline solution or other electrolytic substances.
- Avoid charging a rechargeable battery when the temperature is not within 5°C - 35°C (41° - 95° Fahrenheit).
- Never expose a battery to any liquid.
- Never expose a battery to excessive heat such as direct sunlight or fire. Never use a battery pack in an unventilated vehicle where excessive internal temperatures may be encountered.
- Always keep batteries out of the reach of infants and small children.



# CAVALIER

RESPECT THE CRAFT

## Questions?

[www.cavalieraudio.com](http://www.cavalieraudio.com)

1-800-925-6224